


# Poly Triad AA, CR . . . Simply Brilliant

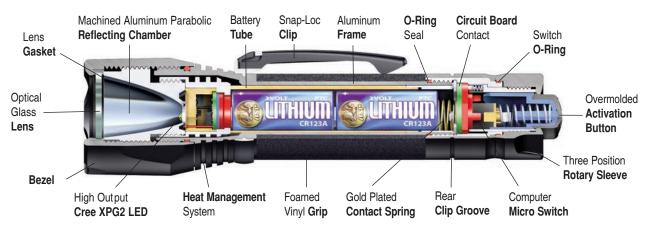

### **Poly Triad CR**

### Background

Designed to professional law enforcement standards

Polymer construction Aluminum frame

No sharp edges

O-ring sealed for maximum water resistance

Distinct profile

### **AA Specifications**

7.125" Length 181 mm 1.40" Diameter 35.6 mm Weight 141.7 grams 5 ounces

(with batteries)

System 3 volt

Flashlight Output 275 lumens (ANSI Standard)

Run Time 1.75 hours

**CR Specifications** 

6.125" Length 156 mm Diameter 1.40" 35.6 mm Weight 5 ounces 85 grams

(with batteries) 6 volt System

Flashlight Output 300 lumens (ANSI Standard) 2 hours Run Time

Matte Black, Coyote, Yellow Foamed vinyl grip Front clip groove Rear clip groove



Detachable

#### **Power Cells**

Two Lithium PTC protected Safety vent Ten year shelf life Leak proof Vibration resistant Link case

#### **Power Cell Tube**

Foamed vinyl grip O-ring sealed

## Locking Switch

Back mounted

Quick and positive switch location under stress

O-ring sealed activation button

Locked (center)

Constant on/off switch activation (right) Intermittent switch activation (left) O-ring sealed switch cover PC board positive circuit contact Sensitive and quiet switch activation Computer micro switch controlled Self-cleaning (no carbon buildup) Fail safe (backup) switch circuits Replaceable modular switch assemblies O-ring sealed connection to the light body

Rotate one full turn to prevent accidental activation



#### Reflector Assembly

Parabolic Extremely durable Computer calculated ray traces Long distance penetrating beam

Room illuminating halo Gasket sealed

#### **LED Assembly**

Proprietary heat management Custom driver Smart chip technology Tempered optical glass lens

**Belt Case** 

Gasket sealed



## Body









